

Ringgold County Board of Supervisors Minutes

August 21, 2023

The Ringgold County Board of Supervisors met in regular session Monday, August 21, 2023. The meeting was called to order at 9:00 A.M with the following members present: Colby Holmes, Randy Taylor and Steve Knapp.

A motion was made by Taylor, second by Knapp to approve the agenda.
AYES: Unanimous NAYS: None

Engineer Jared Johnson met with the Board to provide Secondary Roads updates. The tractor and mower have been out working to mow vegetation along roadsides. Last week work was completed along J20 and P33 in the Northern part of the County.

FM rock was hauled to the Northeast districts.

The crew began hauling base rock on 140th Street/320th Ave. The plan is to haul the base rock now to provide time for material to naturally time down and allow the roadway cross section to be shaped. This road is then planned to be seal coat surfaced next late spring/early summer.

Guardrail anchor inserts were fabricated in the shop.

The crew worked to install requested, landowner paid for, entrances in the North Central Maintainer district.

Work order update:

W.O. 1088: Re-sealcoat P32 from HWY 169 to Delphos. Both lifts of seal coat have been completed along the length of the project. The department will continue to monitor the roadway and sweep free chips back to the middle of the roadway as needed.
(Complete)

The shouldering crew for Manatts was on the J55 site last week working. Shoulder finishing and construction work was completed. Manatts then began placing granular shoulder material. It is anticipated that all shoulder construction work will be completed early this week. The guardrail subcontractor will be onsite this week to install guardrails at the three bridge locations. Currently it is planned for the line painting subcontractor to be onsite next week to paint roadway lines.

Last week the Contractor for the Benton 11 project continued to work on the final site shaping, installing rock ditch checks, placing revetment at the culvert outlet, placing granular surfacing material, and spreading topsoil. A soft spot was discovered in the roadway. The contractor cored out that location, then placed and compacted suitable fill material.

Last week at the Tingley 1 site the crew placed granular material on the abutment berms, cutoff and torch cut bracket holes at the east pier, interior span falsework piling were cutoff and cross braced, support brackets were installed at the east and west abutments along with the east and west piers, false caps were set at the piers and false piers, stringers were installed, decking panels were set, and abutment haunch reinforcing steel tied at the east abutment. This week it is

planned to finish decking around the piers and abutments, set curb forms, install backwall forms, and begin tying slab reinforcing steel.

The Board tabled approval of claims.

The Board began a road project tour with Engineer Jared Johnson.

The Board then met with Conservation Director Travis Scott for a tour of the cabins and the projects at the lake.

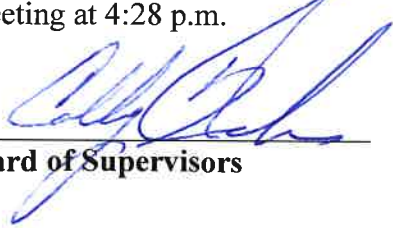
The Board recessed at 1:30 p.m. for lunch.

At 2:30 p.m. the Board met with members of the Rural Improvement Zone (RIZ) at Sun Valley Lake for a tour of recent RIZ projects.

A motion was made by Knapp and seconded by Taylor approve the minutes. Motion carried.

There was no further business. A motion was made by Taylor and seconded by Holmes to adjourn the meeting at 4:28 p.m.

ATTEST:


Board of Supervisors


Ringgold County Deputy Auditor